



Oil Cooler


A SERIES

TECHNICAL SPECIFICATION

		Model						
		A06 24	A06 24 F	A06 12	A06 12 F	A08 24	A08 24 F	A08 12
Mixer size	m ³	6 ÷ 7	6 ÷ 7	6 ÷ 7	6 ÷ 7	8 ÷ 10	8 ÷ 10	8 ÷ 10
Cooling capacity	kW	6 ÷ 12	6 ÷ 12	6 ÷ 12	6 ÷ 12	10 ÷ 15	10 ÷ 15	10 ÷ 15
Axial fan diameter	mm	280	280	280	280	305	305	305
Oil tank volume	L	8	8	8	8	8	8	8
Filter grid size	µm	10	10	10	10	10	10	10
Battery voltage	V	24	24	12	12	24	24	12
Fan, shroud and guard		☺	☺	☺	☺	☺	☺	☺
Oil filter, sealing and thermo-switch enclosed			☺		☺		☺	

Clogged filter cartridges can be changed without refilling the hydraulic system.

DRAWINGS

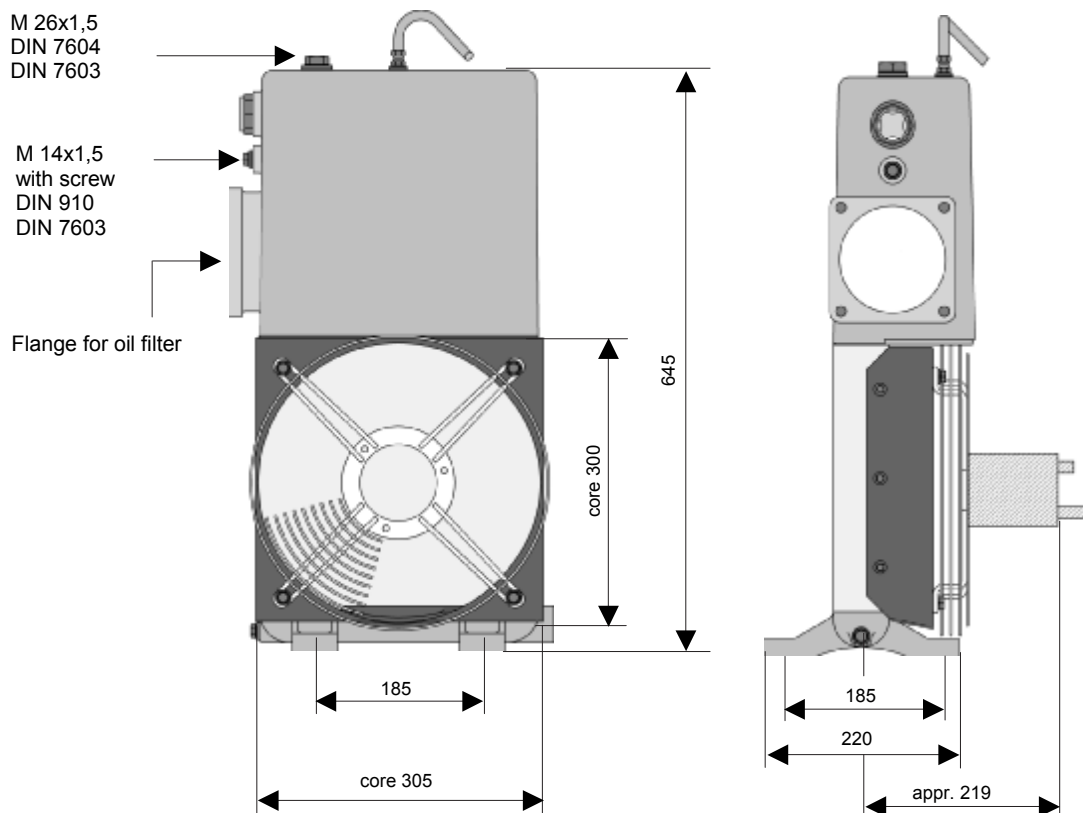

Information contained in this catalogue is accurate as of the publication date and is subject to change without notice. Performance values are typical values. Customers are responsible for selecting products for their applications using normal engineering methods.



SMIT

hydraulics

SMIT Hydraulics

Via Pietro Giardini, 318
41100 Modena - ITALY

info@smithydraulics.it
www.smithydraulics.it

PHONE

+39 059 596 77 44
+39 059 596 77 45

FAX

+39 059 596 08 80
+39 059 596 08 88

(Domestic market)

(International market)